

Guard tour system



ID Card
X00101005



P10 Patrol stick
X00610001



P20 Patrol stick
X00610002



P30 Patrol stick
X00610003




Location tag
X00602015

Instructions for use

First install a passive wireless patrol point at the specified location, then set the location name, patrol personnel and patrol time via software. The patrol personnel hand-held the patrol equipment to the designated location to sense the inspection point according to the time requirement, and the patrol equipment automatically records the location name and arrival time. After the patrol is finished, the data is uploaded to the management center via USB. The inspection report is calculated on a daily, monthly and annual basis to provide a scientific and effective assessment basis for managers.

Illustrating

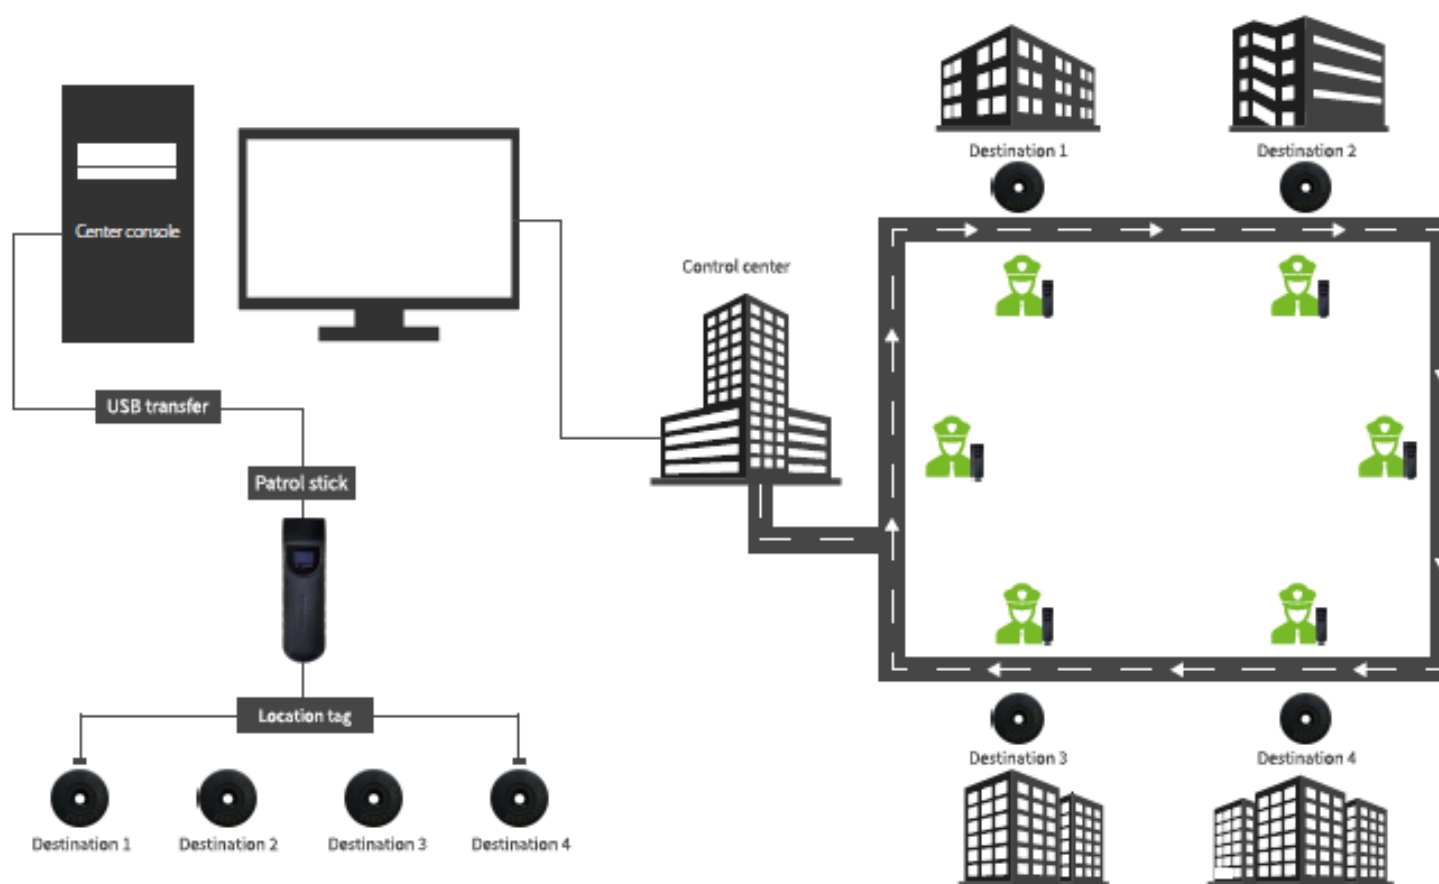

Specifications

- Dimension: 158*φ26(mm)
- Weight: 125g
- Read mode: RFID auto-induction
- Read distance: 3-5 cm
- Read prompt: Light+vibration
- Capacity: 16MB, can store up to 57,000 records
- Battery: 3.6V built-in rechargeable lithium battery, a full charge can support above 45 days each 200 readings per day
- Communication: USB, no need install USB driver
- Working Temperature:-20°C-80°C
- The machine fell from a height of 1 meter without damage.
- Patrol software downloads are used directly without installation



P10 Patrol stick

Specifications

- Dimension:158*27*30 (mm)
- Weight: 170g
- Materials:Hard anodizing aviation alloy
- Capacity: up to 57,000pcs records
- Read Mode:RFID auto-induction,no need to press
- Reading distance:3-5cm
- 3.6V built-in rechargeable lithium battery, a full charge can support above 45 days each 200 readings per day
- Communication: USB, no need to install USB driver
- Direction:light +vibration/buzzer beeps when read successfully
- Working Temperature:-20 °C -80 °C
- Three lighting modes (medium/high brightness/SOS)
- The machine fell from a height of 1 meter without damage.
- Patrol software downloads are used directly without installation



P20 Patrol stick

Specifications

- Dimension: 165*42*25(mm)
- Weight: 300g
- Read mode: RFID auto-induction, no need to touch
- Read distance: 3-5cm
- Read prompt: Light + beep or vibration, can be set in software
- Capacity: 16MB, can store up to 57,000 records
- Battery: 3.6V built-in rechargeable lithium battery, a full charge can support above 40 days each 200 readings per day
- Communication: USB, no need to install USB driver
- Working Temperature:-20 °C -80 °C
- 1 inch LCD screen
- The machine fell from a height of 1 meter without damage.
- Patrol software downloads are used directly without installation



P30 Patrol stick